



LUDUS

SHOWCASE

1. Design

LUDUS - BREAKING THE MOLD

2. Editions

CONDITIONS TAILORED TO YOUR PRODUCTS

3. The right fit

PRECISION IN EVERY DETAIL

4. In the details

BUILT FOR WHAT'S NEXT

DESIGN

Clean lines and expansive transparent surfaces give LUDUS a distinctive silhouette, with the display visible from every angle.





CHOOSE YOUR VIEW

Explore the LUDUS glass options. Three glass configurations give LUDUS the flexibility to adapt to different requirements — from thermal performance and protection to maximum transparency and safety.




SHIELD

Double glazed protection.



PURE VISION

Uninterrupted visibility.

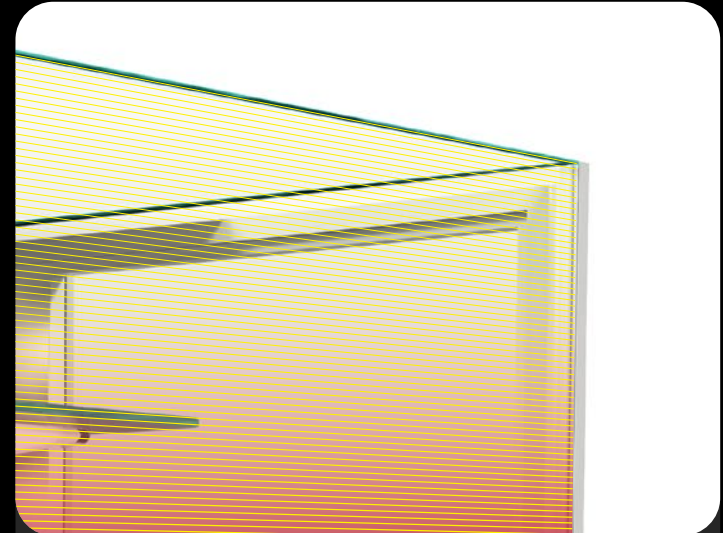

LAMINATED GLASS

Bonded layers, one panel.

Discover each glass option on the following pages.

DOUBLE GLAZED PROTECTION

LUDUS SHIELD

Double-glazed front, top and side panel support insulation around the refrigerated display.





UNINTERRUPTED VISIBILITY

LUDUS PURE VISION

Frameless glass for clear, uninterrupted views. Heating extends across the entire length and width of the glass.






BONDED LAYERS, ONE PANEL

LAMINATED GLASS

Glass layers are bonded together with an interlayer to form a laminated panel.

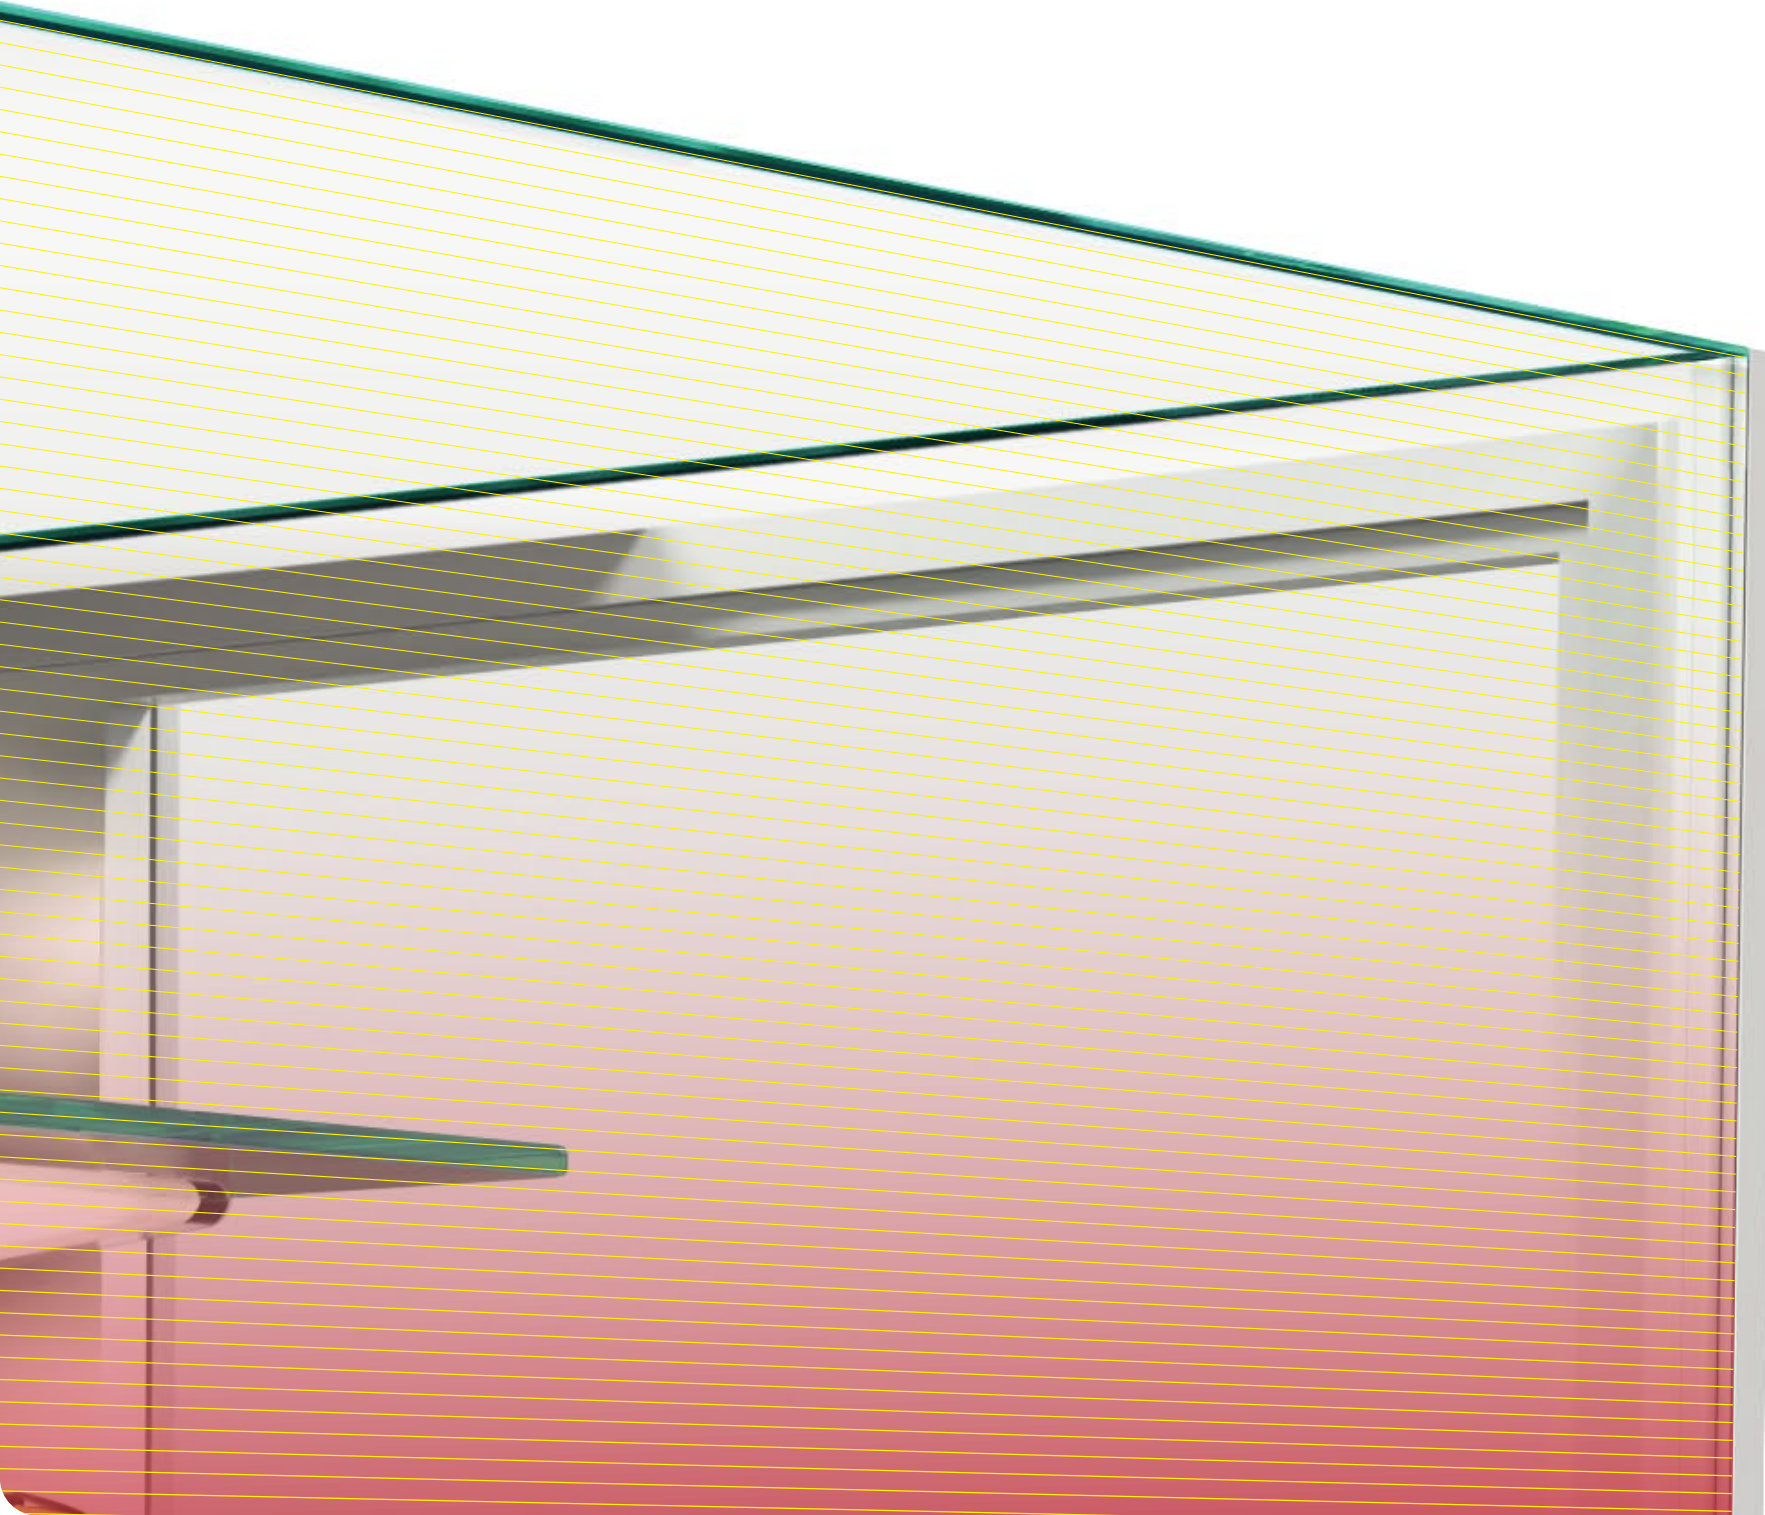



ONE DESIGN, MANY EXPRESSIONS

Designed to adapt seamlessly to different interiors. From soft, bright environments to bold, sophisticated settings, its clean architectural form becomes part of the design.



YOUR LUDUS

WHITE GLASS FINISH

Acrylic stone and glass decoration, with a palette that connects the display to your interior.



DECORATION



Black



Grey



White



Gold



Pistachio



Cloud



Antique Pink

YOUR LUDUS

BLACK GLASS FINISH

A stronger outline. The same choice of decorative colors, from understated neutrals to expressive accents.



DECORATION

-  Black
-  Grey
-  White
-  Gold
-  Pistachio
-  Cloud
-  Antique Pink

LUDUS EDITIONS

Pastry and chocolate editions combine dedicated temperature ranges with adjustable humidity for ideal preservation.



PASTRY

TEMPERATURE

+2 to +8
°C

ADJUSTABLE HUMIDITY

35-75%



CHOCOLATE

TEMPERATURE

+12 to +15
°C

ADJUSTABLE HUMIDITY

35-75%



HEATED DISPLAY

TEMPERATURE

+40 to +70
°C

FOR WARM PRODUCT
PRESENTATION

LUDUS BAKERY

OPEN FRONT

An open customer-facing display with illuminated shelves and clear side glass. Baked goods stay visible and within easy reach.



MADE FOR DAILY SERVICE

+2°C / +8°C

Bottom air channels distribute cooled air through the display, supporting temperature consistency across the shelves.

Operating temperature range for the refrigerated pastry configurations.



VENTILATED COOLING
Airflow through the display.


AUTOMATIC DEFROST
For daily refrigerated operation.

UNIT PLACEMENT
Internal or external unit.

THE RIGHT FIT

Explore the complete LUDUS range, with detailed dimensions and configuration options designed to fit every space without compromising presentation. Choose the right fit. Keep the experience consistent.

FOUR LENGTHS. TWO DEPTHS. TWO HEIGHTS.

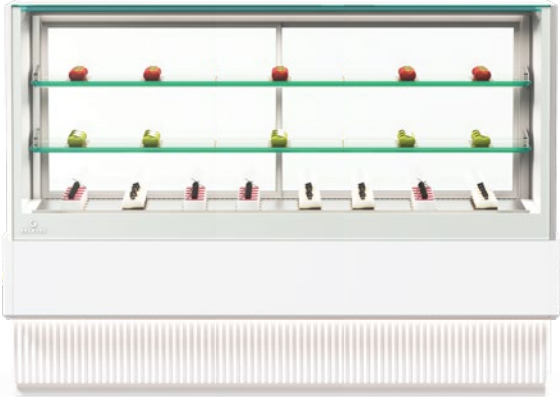
LUDUS 100	LUDUS 125	LUDUS 150	LUDUS 175
			
1000 mm	1250 mm	1500 mm	1750 mm
700 / 800	1350 / 1450	+2°C / +8°C	
DEPTH / mm	HEIGHT / mm	PASTRY TEMPERATURE	

Detailed configurations on the following pages.


LUDUS 175

Length: 1750mm Width: 700/800mm Height: 1350/1450mm

SHELVES CAPACITY

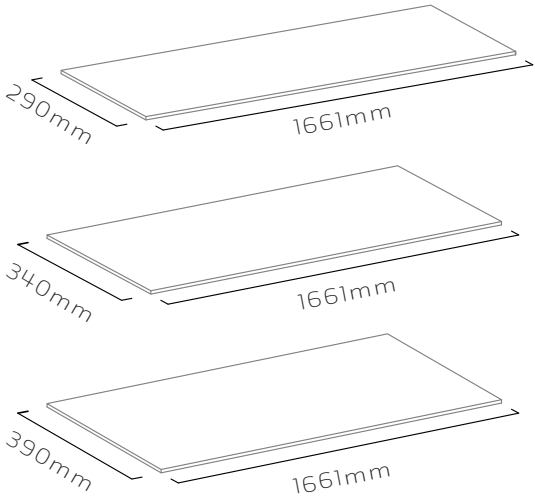

AVAILABLE HEIGHTS & WIDTHS

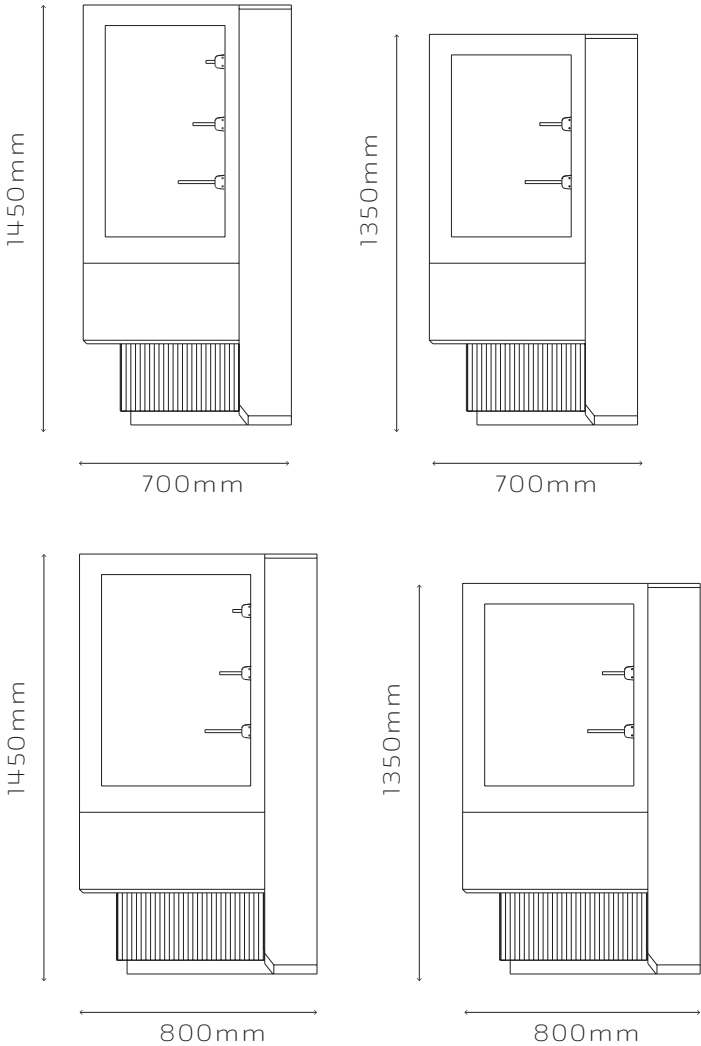


SPECIFICATIONS


Electric Power Supply	230V / 1Ph / 50Hz
Power / Current Consumption	1.5KW / 16A
Compressor Type	Hermetic
Condensation Type	Air-Cooled
Expansion	Expansion Valve
Defrost Type	Automatic
Refrigerant Gas	R455c
Refrigerant Gas Capacity	1.5kg
Configuration	+2°C / +8°C
Climate Class	4
Engine	INT/EXT

LUDUS 150


Length: 1500mm Width: 700/800mm Height: 1350/1450mm

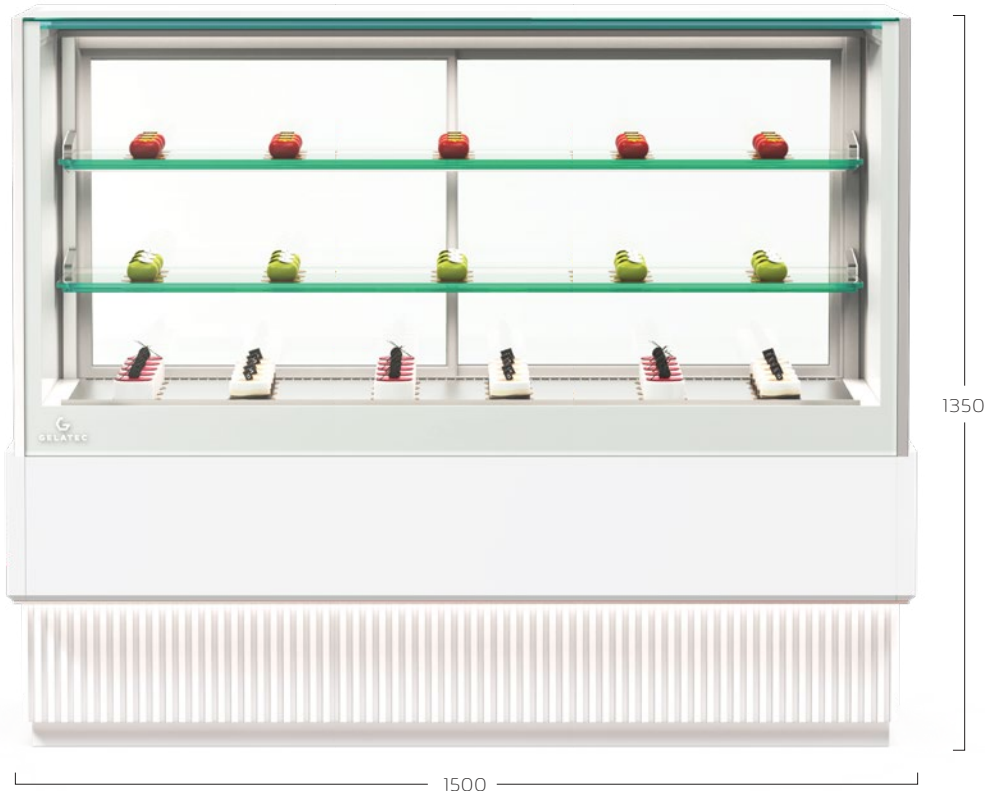

SHELVES CAPACITY

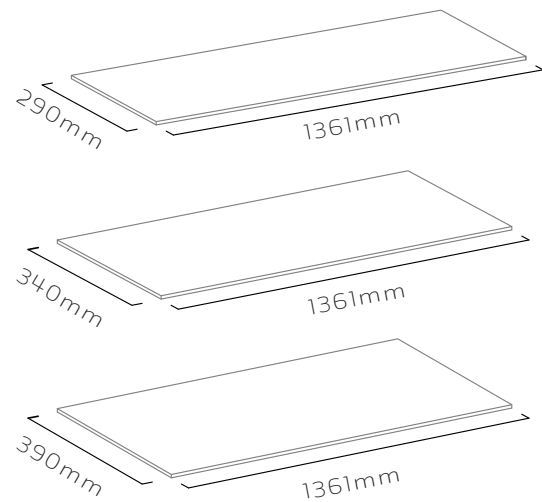

WIDTHS

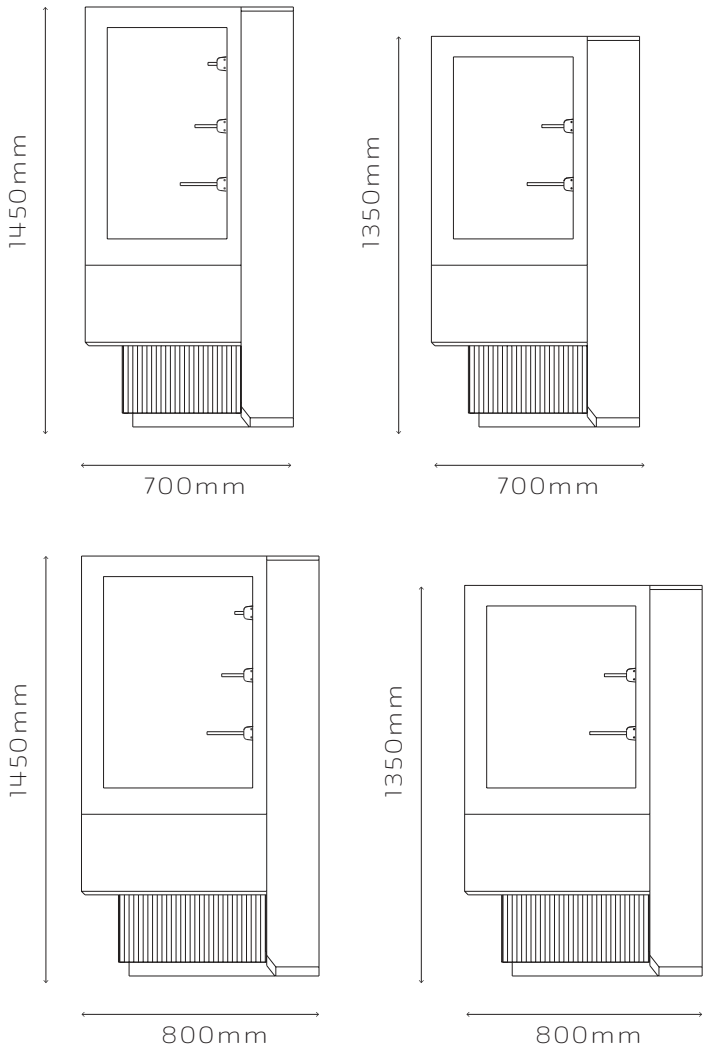

SPECIFICATIONS


Electric Power Supply	230V / 1Ph / 50Hz
Power / Current Consumption	1KW / 16A
Compressor Type	Hermetic
Condensation Type	Air-Cooled
Expansion	Expansion Valve
Defrost Type	Automatic
Refrigerant Gas	R455c
Refrigerant Gas Capacity	1kg
Configuration	+2°C / +8°C
Climate Class	4
Engine	INT/EXT
Weight	000kg

LUDUS 125


Length: 1250mm Width: 700/800mm Height: 1350/1450mm



SHELVES CAPACITY

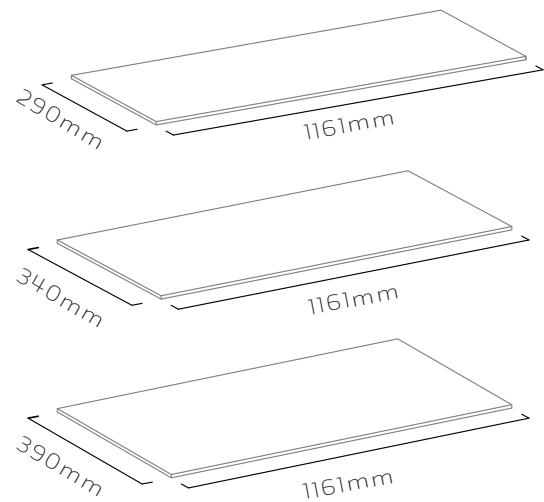

AVAILABLE HEIGHTS & WIDTHS

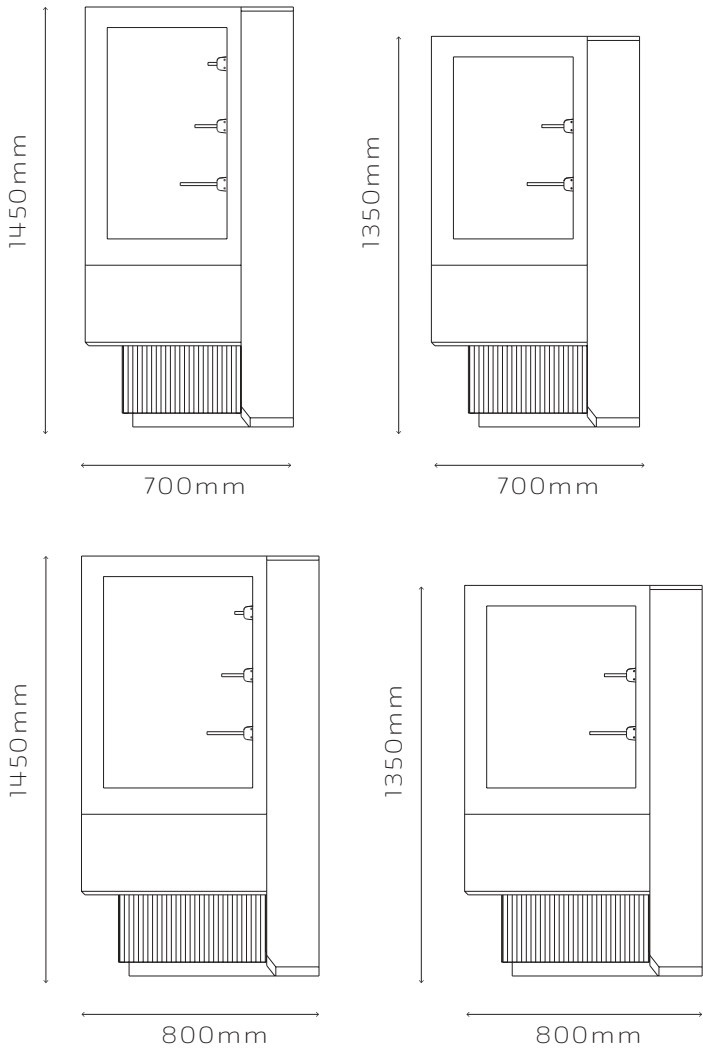

SPECIFICATIONS


Electric Power Supply	230V / 1Ph / 50Hz
Power / Current Consumption	1KW / 16A
Compressor Type	Hermetic
Condensation Type	Air-Cooled
Expansion	Expansion Valve
Defrost Type	Automatic
Refrigerant Gas	R455c
Refrigerant Gas Capacity	1kg
Configuration	+2°C / +8°C
Climate Class	4
Engine	INT/EXT
Weight	000kg

LUDUS 100


Length: 1000mm Width: 700/800mm Height: 1350/1450mm



SHELVES CAPACITY

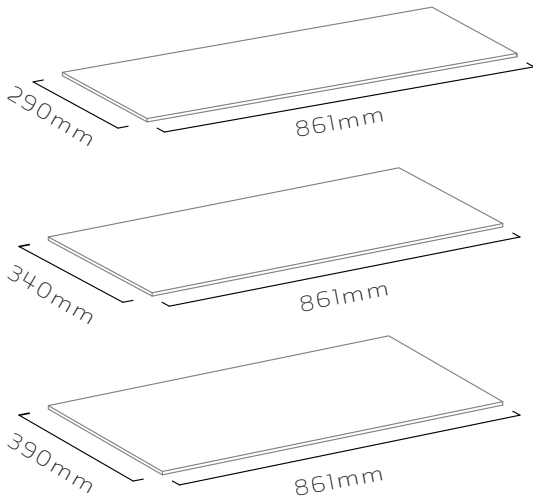

AVAILABLE HEIGHTS & WIDTHS

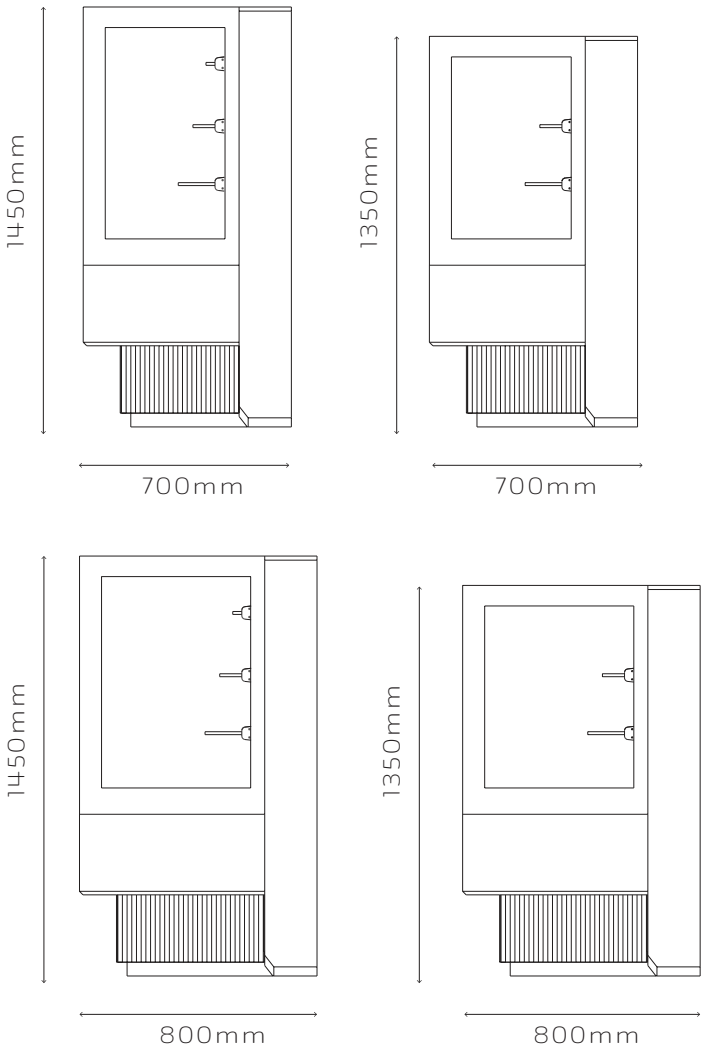


SPECIFICATIONS

Electric Power Supply	230V / 1Ph / 50Hz
Power / Current Consumption	1KW / 16A
Compressor Type	Hermetic
Condensation Type	Air-Cooled
Expansion	Expansion Valve
Defrost Type	Automatic
Refrigerant Gas	R455c
Refrigerant Gas Capacity	1kg
Configuration	+2°C / +8°C
Climate Class	4
Engine	INT/EXT
Weight	000kg

IN THE DETAILS

Pastry and chocolate editions combine dedicated temperature ranges with adjustable humidity for ideal preservation.

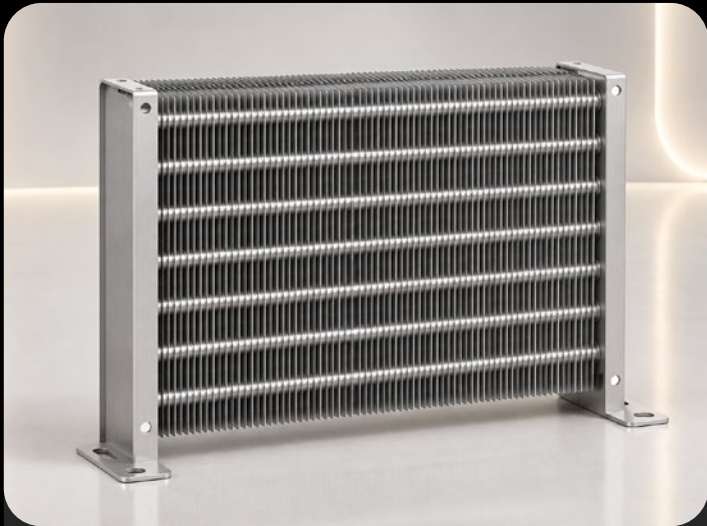

EVAPORATOR

Protective epoxy coating

The evaporator features a special epoxy coating suitable for food environments.



WHEELS & FEET

Easy to reposition

Swivel wheels help with repositioning and access for cleaning, while adjustable feet stabilize the showcase



DOORS

Soft close

Smooth sliding doors with soft-close and stop system for effortless operation.

COOLING TECHNOLOGY

Built to withstand the toughest environments, LUDUS is equipped with advanced refrigeration system, offering exceptional performance and energy efficiency.

Tropical**PLUS+**



TROPICAL PLUS

Built for hot climates.

Designed for hot climates, Tropical Plus Edition combines reliable cooling, energy efficiency and durable construction.

MOTOR

Built to withstand

Engineered for extreme conditions, delivering reliable performance, efficiency, and lasting durability.


AIRWAY SYSTEM

Uniformity

Delivers perfectly balanced airflow, keeping every shelf at the optimal temperature uniformity.

CONTROL WITHIN REACH.

Connected control brings temperature settings, monitoring and maintenance alerts to a mobile interface.

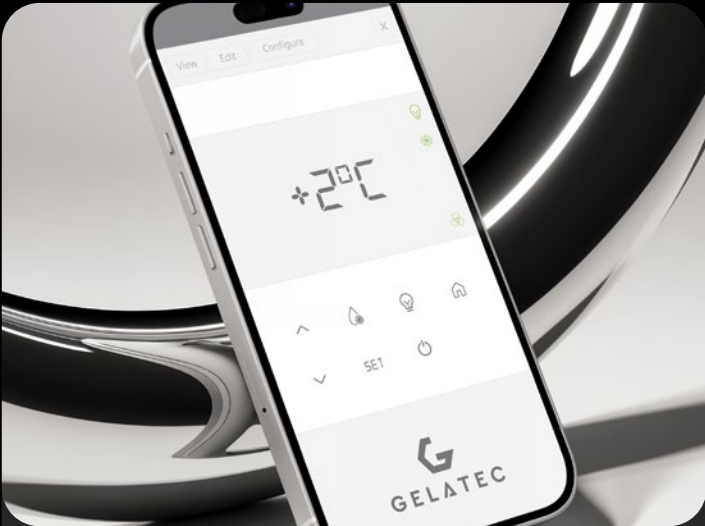

MY GELATEC

High Performance

Monitor temperatures, adjust settings remotely, and stay informed with maintenance alerts and operational updates



CONTROLLER

Built to withstand

Controlled with Dixell electronic thermostat specially designed for Gelatec's technology.



CCT LED LIGHTS

Illumination

Evenly enhanced illumination across the shelves and front panelling, remotely adjustable from 2700K-6500K, with 98 CRI daylight-quality rendering for superior product presentation and energy-efficient performance.





GELATEC